




CREMAGLIERE INTESTATE PER IL MONTAGGIO CONTINUO - ANGOLO DI PRESSIONE 20°

RACKS FOR CONTINUOUS MOUNTING - PRESSURE ANGLE 20°

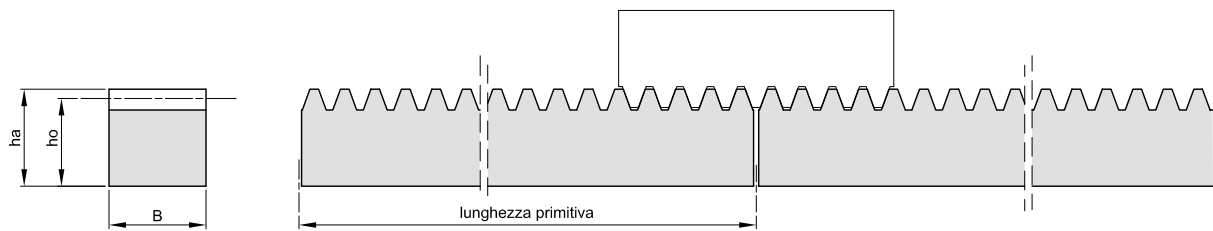


Materiale: Acciaio C45 / * Materiale: Acciaio 40Cr

modulo x lunghezza	codice	lunghezza primitiva	denti	B x ha	ho	Kg.
1 x 500	490110050	499,51	159	15 x 15	14	0,8
1 x 1000	490110100	1002,17	319	15 x 15	14	1,6
1 x 2000	490110200	2001,19	637	15 x 15	14	3,3
1 x 3000	490110300	3000,22	955	15 x 15	14	4,9
1,5 x 500	490115050	499,51	106	17 x 17	15,5	1
1,5 x 1000	490115100	1003,74	213	17 x 17	15,5	2,1
1,5 x 2000	490115200	2002,77	425	17 x 17	15,5	4,1
1,5 x 3000	490115300	3001,79	637	17 x 17	15,5	6,1
2 x 500	490120050	502,65	80	20 x 20	18	1,4
2 x 1000	490120100	1005,31	160	20 x 20	18	2,8
2 x 2000	490120200	2004,34	319	20 x 20	18	5,6
2 x 3000	490120300	3003,36	478	20 x 20	18	8,4
2,5 x 500	490125050	502,65	64	25 x 25	22,5	2,2
2,5 x 1000	490125100	1005,31	128	25 x 25	22,5	4,4
2,5 x 2000	490125200	2002,77	255	25 x 25	22,5	8,7
2,5 x 3000	490125300	3000,22	382	25 x 25	22,5	13,0
3 x 500	490130050	499,51	53	30 x 30	27	3,2
3 x 1000	490130100	1008,45	107	30 x 30	27	6,3
3 x 2000	490130200	2007,48	213	30 x 30	27	12,6
3 x 3000	490130300	3006,5	319	30 x 30	27	18,6
4 x 1000	490440100	1005,31	80	30 x 30	26	6
4 x 2000	490440200	2010,62	160	30 x 30	26	11,94
4 x 500	490140050	502,65	40	40 x 40	36	5,6
4 x 1000	490140100	1005,31	80	40 x 40	36	11,2
4 x 2000	490140200	2010,62	160	40 x 40	36	22,4
4 x 3000	490140300	3003,36	239	40 x 40	36	31,3
* 5 x 500	490150050	502,65	32	50 x 50	45	8,7
* 5 x 1000	490150100	1005,31	64	50 x 50	45	17,5
* 5 x 2000	490150200	2010,62	128	50 x 50	45	35
* 5 x 3000	490150300	3000,22	191	50 x 50	45	52
* 6 x 1000	490160100	1017,88	54	60 x 60	54	25,2
* 6 x 2000	490160200	2016,90	107	60 x 60	54	50,4
* 8 x 1000	490180100	1005,31	40	80 x 80	72	44
* 8 x 2000	490180200	2010,62	80	80 x 80	72	89



CREMAGLIERE INTESTATE PER IL MONTAGGIO CONTINUO - TEMPRATE AD INDUZIONE RACKS FOR CONTINUOUS MOUNTING WITH HARDENED TEETH

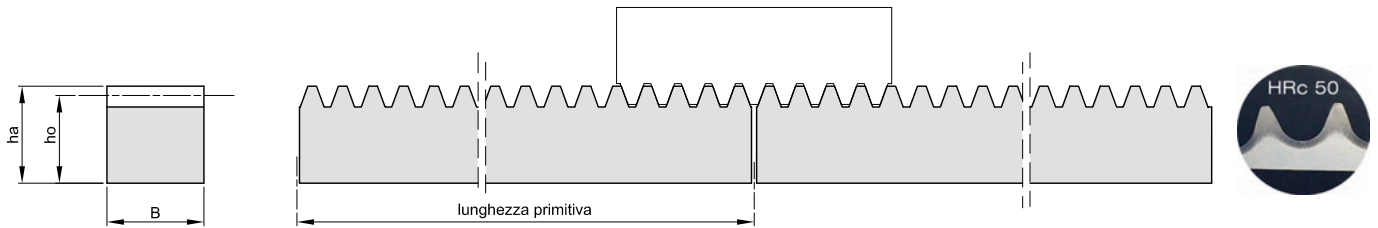


Angolo di pressione 20° / Pressure angle 20°

Materiale: Acciaio C45 / * Materiale: Acciaio 40 Cr

modulo x lunghezza	codice	lunghezza primitiva	denti	B x ha	ho	Kg.
2 x 1000	492120100	1005,31	160	20 x 20	18	2,8
2 x 2000	492120200	2004,34	319	20 x 20	18	5,6
2,5 x 1000	492125100	1005,31	128	25 x 25	22,5	4,4
2,5 x 2000	492125200	2002,77	255	25 x 25	22,5	8,7
3 x 1000	492130100	1008,45	107	30 x 30	27	6,3
3 x 2000	492130200	2007,48	213	30 x 30	27	12,6
4 x 1000	492140100	1005,31	80	40 x 40	36	11,2
4 x 2000	492140200	2010,62	160	40 x 40	36	22,4
* 5 x 1000	492150100	1005,31	64	50 x 50	45	17,5
* 5 x 2000	492150200	2010,62	128	50 x 50	45	35,0
* 6 x 1000	492160100	1017,88	54	60 x 60	54	25,2
* 6 x 2000	492160200	2016,90	107	60 x 60	54	50,4



CREMAGLIERE INTESTATE PER IL MONTAGGIO CONTINUO IN ACCIAIO INOX RACKS FOR CONTINUOUS MOUNTING IN STAINLESS STEEL

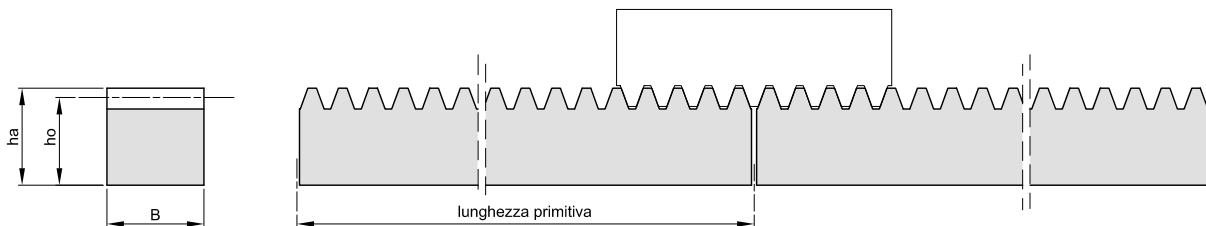

Angolo di pressione 20° / Pressure angle 20°

Materiale: INOX AISI 304

modulo x lunghezza	codice	lunghezza primitiva	denti	B x ha	ho	Kg.
1 x 1000	493110100	1002,17	319	15 x 15	14	1,6
1 x 2000	493110200	2001,19	637	15 x 15	14	3,3
1,5 x 1000	493115100	1003,74	213	17 x 17	15,5	2,1
1,5 x 2000	493115200	2002,77	425	17 x 17	15,5	4,1
2 x 1000	493120100	1005,31	160	20 x 20	18	2,8
2 x 2000	493120200	2004,34	319	20 x 20	18	5,6
2,5 x 1000	493125100	1005,31	128	25 x 25	22,5	4,4
2,5 x 2000	493125200	2002,77	255	25 x 25	22,5	8,7
3 x 1000	493130100	1008,45	107	30 x 30	27	6,3
3 x 2000	493130200	2007,48	213	30 x 30	27	12,6
4 x 1000	493140100	1005,31	80	40 x 40	36	11,2
4 x 2000	493140200	2010,62	160	40 x 40	36	22,4